

Document number	Revision
DOCU12387	1

Create a new user group in Highstage - Configuration

Create a new user group in Highstage - Configuration

[Background](#)

[Prerequisites](#)

[Configuration](#)

Background

In this article, you will learn how to enable and configure *create user group* capabilities to your Highstage installation. This will allow for Highstage administrators to create new user groups and populate those groups with existing Highstage users - directly in Highstage.

Prerequisites

The *create user group* capability in Highstage is supported from Highstage version SW10055-8G. Please ensure that your Highstage installation is running Highstage version SW10055-8G or newer.

You can check which Highstage version you are running by navigating to `SYSTEM` > `SUPPORT SERVER` > `Version history` in the side navigation menu as an administrator.


Configuration

To be able to create new user groups directly from Highstage, you must add the following snippet to the `custom.schema.xml` located in the *tweak* folder on the server, where your Highstage installation is located:

```
<include src="/ts/ldap/management/usergroup.schema.xml" />
```

Reset Highstage for the changes in the `custom.schema.xml` to take effect.

You have successfully added *create new group* capabilities to your Highstage installation. Highstage administrators are now able to create new Highstage user groups by navigation to `SYSTEM` > `Roles` and clicking *New group* in the side navigation menu with administrator privileges' (*AdminRead* or *AdminWrite* user level):

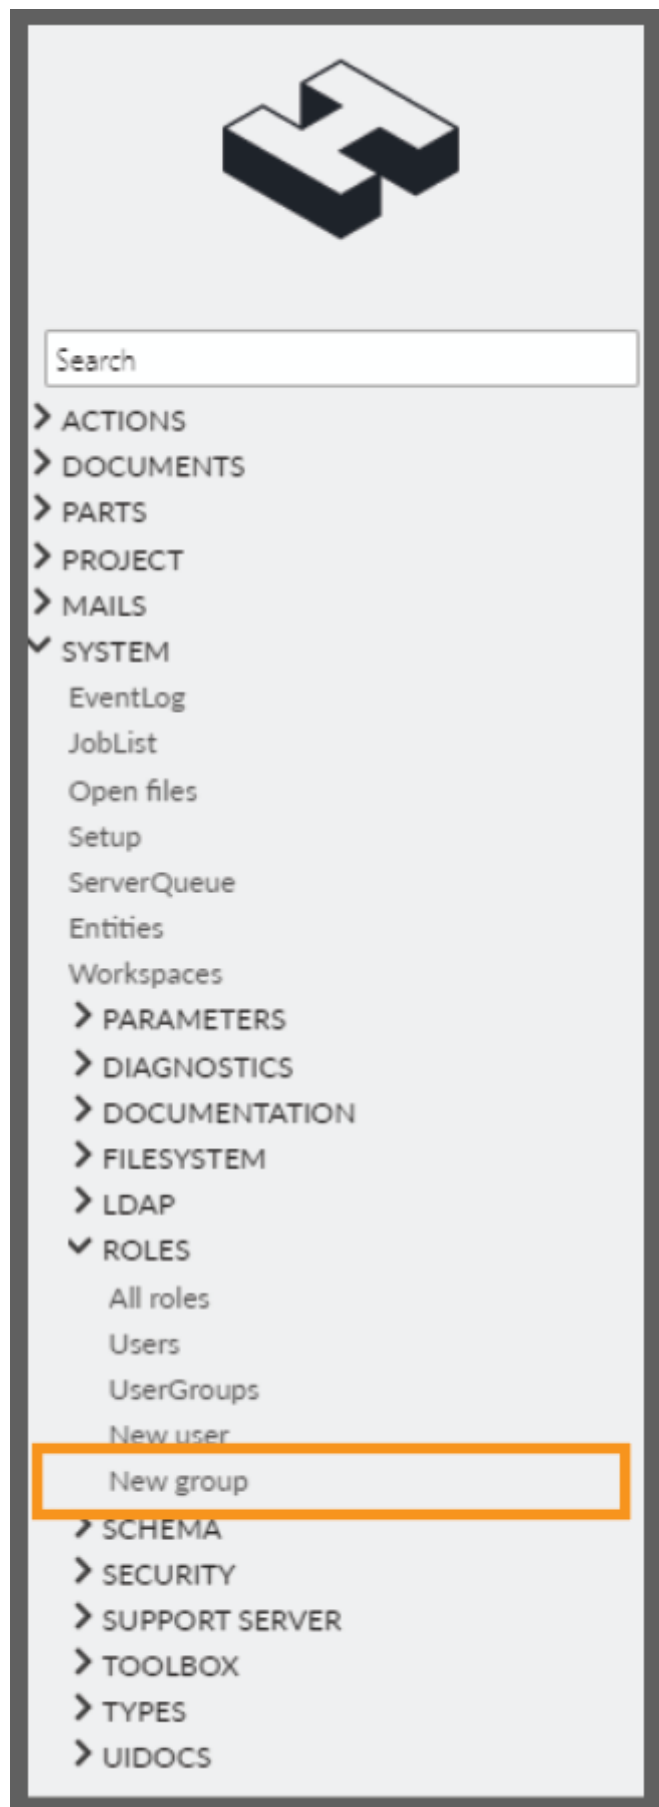



Highstage